

Intake/delivery connections 1" - flow rate 100 l/min

BOXER 81

construction materials: PP - PVDF - ALU



PP


Intake/delivery connections	G 1"
Air connection	G 3/8"
Max. self-priming capacity*	6 m
Max. flow rate*	100 l/min
Max. head*	70 m
Max. air supply pressure	7 bar
Max. diameter of passing solids (spherical particles)	4 mm

Net weight	PP	5 Kg	(zone 2) 60°C Max. temp.
	PVDF	6.5 Kg	(zone 2) 95°C Max. temp.
	Alu	6.5 Kg	(zone 2) 95°C Max. temp.

*The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

TECHNICAL DATA

PERFORMANCE

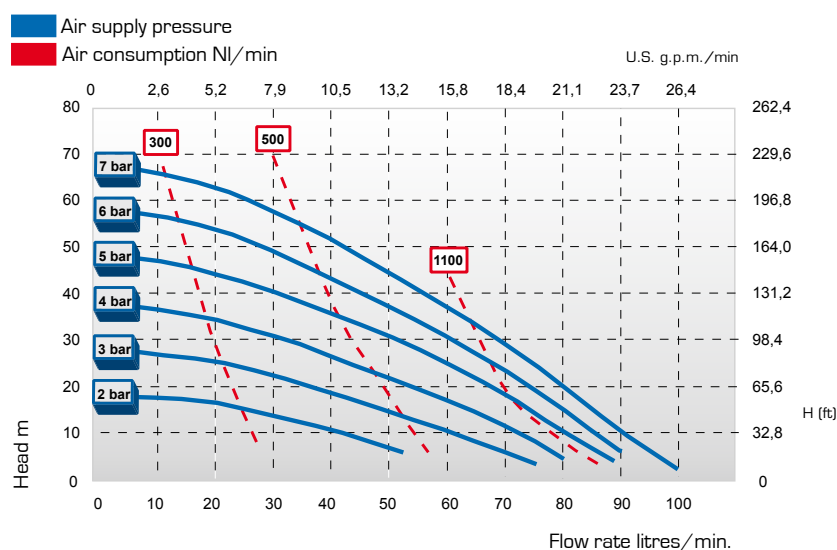


PVDF



ALU

DIMENSIONS

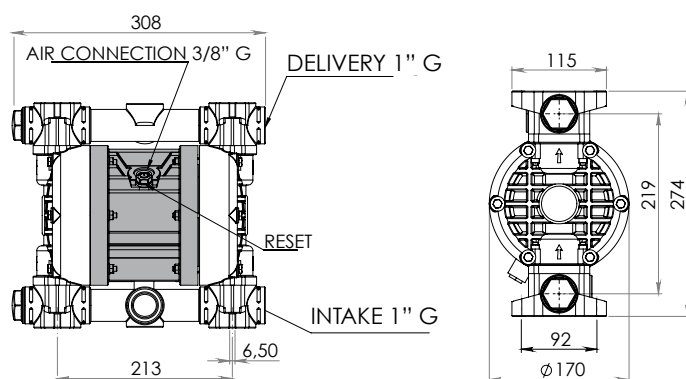

The dimensions shown are in mm. The drawing refers to the plastic pump

All the values shown are approximate and not binding